



PRETEK

APPROVAL SHEET

CUSTOMER NAME :

ITME : 欧式连接器2排32PIN弯针

MODEL : 6032-232-171

MATERIEL NO :

DATE : 08/06/2007

APPROVED BY:

深圳市普瑞泰电子有限公司

地址: 深圳市福田区深南中路南光捷佳大厦2121室




电话: 0755-83981317 83983895

传真: 0755-83981375

网址: www.szpretek.com

邮箱: liubinwu@szpretek.com, wj@szpretek.com

7		8		9		10	
月 表 DATE	設 交 内 容 DESCRIPTION	日 期 DATE	修 改 人 BY	檢 查 人 CHECKED BY	檢 查 日 期 CHECKED DATE	檢 查 內 容 CHECKED CONTENT	檢 查 結 果 CHECKED RESULT
△							

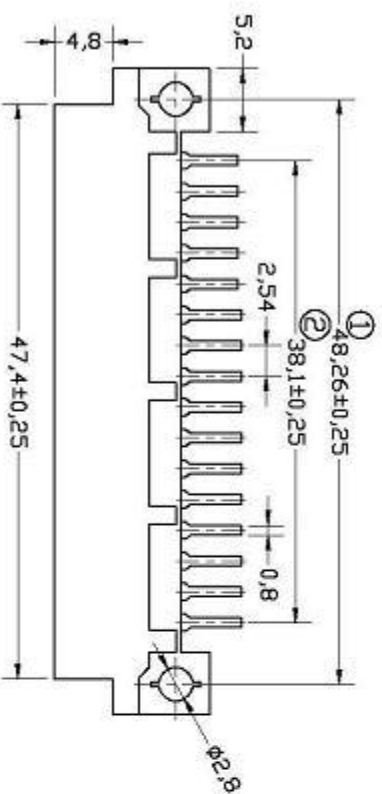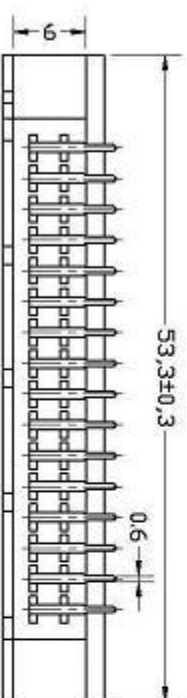

1. Material
Insulator body :Glass Filled PBT UL94-V0
Contact material :Brass
Contact plating :Gold
2. Electrical
Current rating :2Amp
Dielectric withstanding :AC 1000V for 1 minute
Insulation resistance :1000 Megohms min at DC 500V
Contact resistance :10 Milliohms max
3. Operating temperature :-55° C to +105° C
3. (X) "main key dimensions, must be checked.

Technical drawing of a rectangular plate with the following dimensions and features:

- Overall width: $8,4 \pm 0,2$
- Overall height: $45,4 \pm 0,2$
- Inner width: $43,4 \pm 0,2$
- Inner height: $6,2 \pm 0,15$
- A grid of 12 holes is shown within the inner dimensions.
- Dimensions are labeled with circled numbers 3, 4, and 5.

[illegible]