



PRETEK

APPROVAL SHEET

CUSTOMER NAME :

ITME : 欧式连接器3排30PIN直孔

MODEL : 6032-330-251

MATERIEL NO :

DATE : 15/03/2007

APPROVED BY:

深圳市普瑞泰电子有限公司

地址: 深圳市福田区深南中路南光捷佳大厦2121室

电话: 0755-83981317 83983895

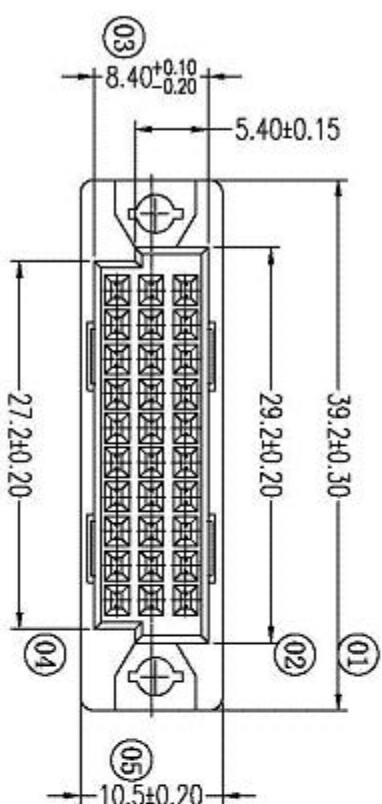
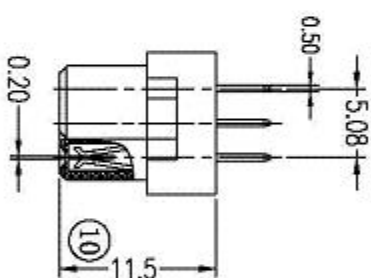
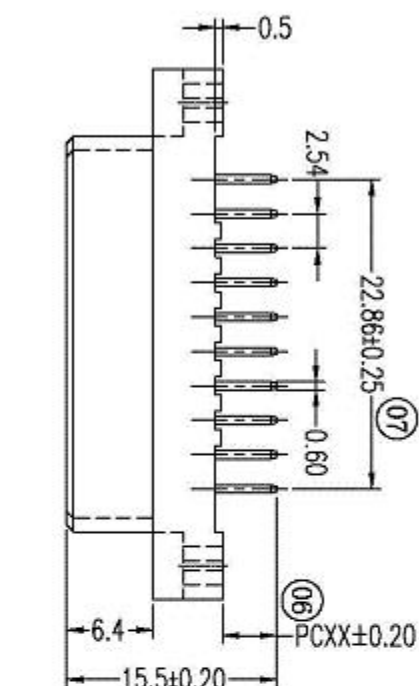
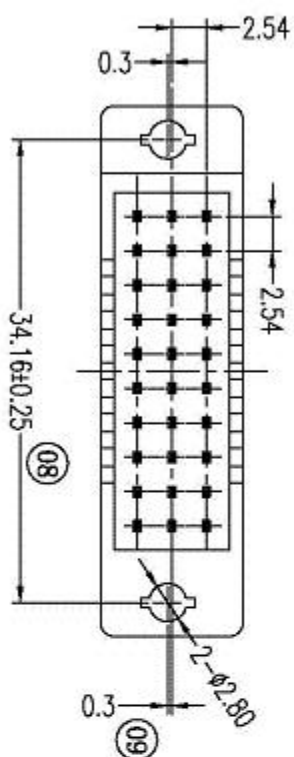
传真: 0755-83981375

网址: www.szpretek.com

邮箱: liubinwu@szpretek.com, wj@szpretek.com

7		8		9		10	
目次	変更内容	日期	修改人	核准			
INDEX	MODIFICATION	DATE	DRAW	APPROVE			
Δ							

- | | |
|---|---|
| 1. Material | |
| Insulator body | :Glass Filled PBT UL94V-0 |
| Contact material | :Phosphor Bronze |
| Contact plating | :Gold |
| surface of contact | :2um/80u" nickel
3um/120u" Tin |
| 2. Electric | |
| Current rating | :5kmpin max |
| Dielectric withstanding | :1000 Megohms in.
at 500V DC voltage |
| Insulation resistance | :1K 500V for 1 minute |
| Contact resistance | :20 Milliohms max |
| Operating temperature | :-55° C to +105° C |
| 3. mechanical | |
| soldering temperature | :260° C, 10seconds max |
| 4. <u>XY</u> means key dimensions, must be checked. | |

[illegible]

注：插板外露尺寸有以下规格PC4. 0mm/PC3. 5mm/PC2. 8mm