



PRETEK

APPROVAL SHEET

CUSTOMER NAME :

ITME : 欧式连接器3排96PIN弯孔

MODEL : 6032-396-271

MATERIEL NO :

DATE : 15/03/2007

APPROVED BY:

深圳市普瑞泰电子有限公司

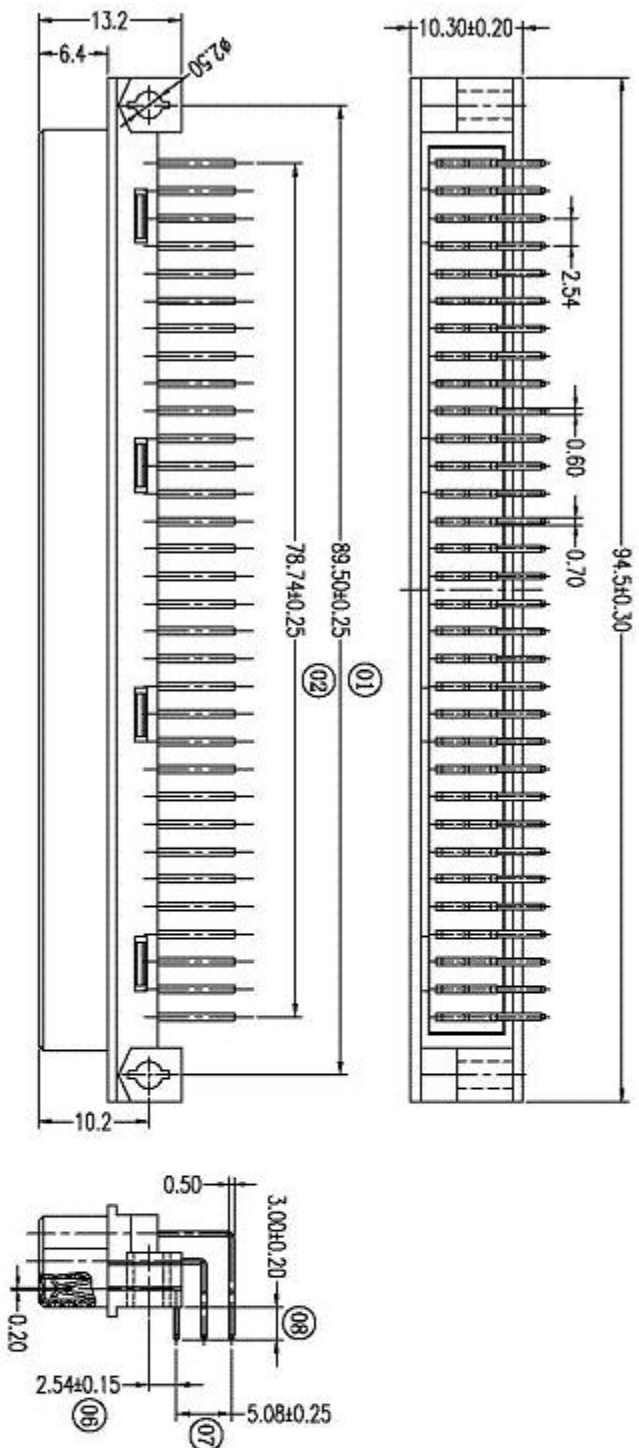
地址: 深圳市福田区深南中路南光捷佳大厦2121室

电话: 0755-83981317 83983895

传真: 0755-83981375

网址: www.szpretek.com

邮箱: liubinwu@szpretek.com, wj@szpretek.com

[illegible]

- | | |
|---|---|
| 1. Material | |
| Insulator body | : Glass Filled PBT UL94V-0 |
| Contact material | : Phosphor Bronze |
| Contact plating | : Gold |
| surface of contact | : 2um/80u nickel
3um/120u Tin |
| 2. Electrica | |
| Current rating | : 24mW/pin max |
| Dielectric withstanding | : 1000 Megohms min.
at 500V DC voltage |
| Insulation resistance | : AC 500V for 1 minute |
| Contact resistance | : 20 Milliohms max |
| Operating temperature | : -55° C to +105° C |
| 3. mechanical | |
| soldering temperature | : 260° C, 10seconds max |
| 4. (XX) mens key dimensions, must be checked. | |

[illegible]