



PRETEK

APPROVAL SHEET

CUSTOMER NAME :

ITME : A型2MM短针压接插座（针）

MODEL : PRT-A110M-D

MATERIEL NO :

DATE : 20/10/2007

APPROVED BY:

深圳市普瑞泰电子有限公司

地址：深圳市福田区深南中路南光捷佳大厦2121室


电话：0755-83981317 83983895

传真：0755-83981375

网址：www.szpretek.com


邮箱：liubinwu@szpretek.com, wj@szpretek.com

CONTACT ARRANGEMENT

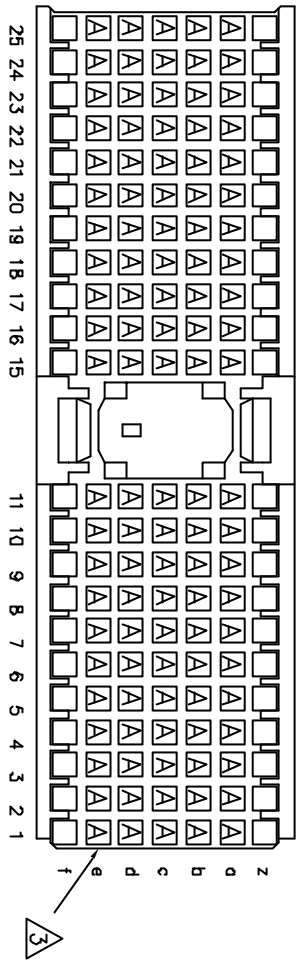


NOTES:

- CONNECTOR MEETS REQUIREMENT OF IEC 61076-4-101
- MATERIAL :
-HOUSING: GLASS-FILLED PBT, COLOR GREY, UL94V-0
-CONTACTS: COPPER ALLOY
- CONTACT DIMENSION
- LENGTH / WIDTH x THICKNESS
A : 5.3 / 0.4 ~ 0.50 x 0.4 ~ 0.36
- CONTACT FINISH
30u"(0.75um) GOLD PLATING ON MATING AREA, TIN PLATING ON TAIL AREA, FLASH GOLD PLATING ON NON-MATING AREA, NICKEL UNDERPLATE ALLOY
- CONNECTOR PRINTED WITH COMPANY NAME, PART NUMBER, AND BATCH NUMBER

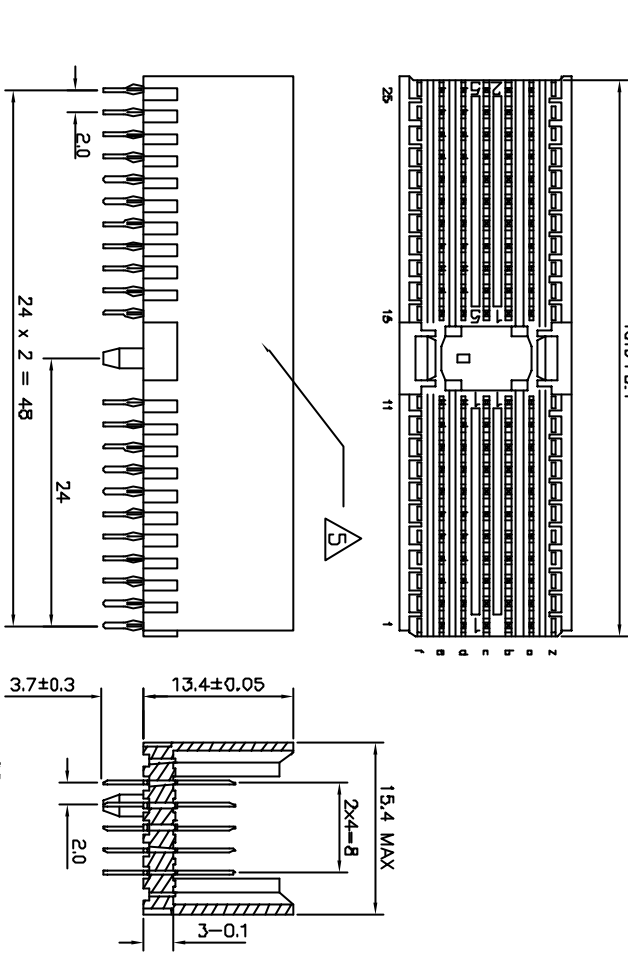


RECOMMENDED HOLE SPECIFICATIONS

SECTION A-A
SCALE 6 : 1

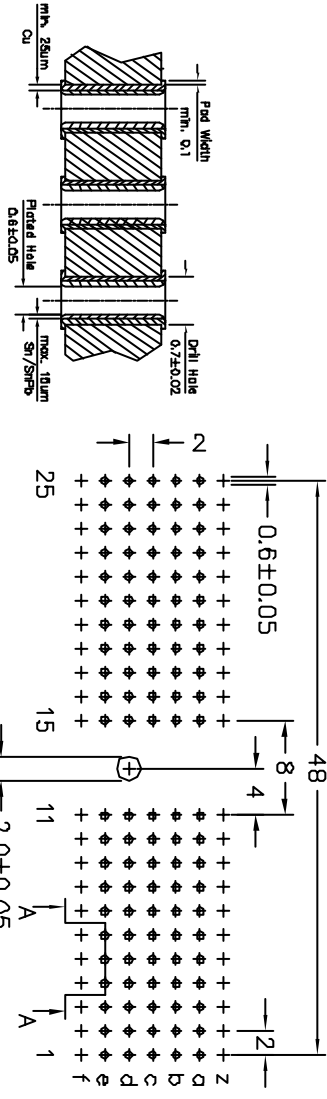

RECOMMENDED PCB HOLE LAYOUT

COMPONENT SIDE
SCALE 1.5 : 1

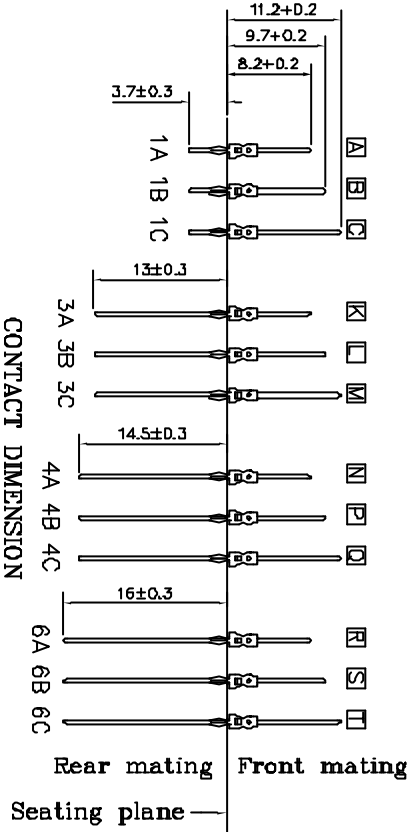

DESCRIPTION : 2.0mm MALE, TYPE A

CUSTOMER DRAWING

PART NUMBER

PRT-A110M-D

深圳市普瑞泰电子有限公司

MMILLIMETRES
X XXX ±0.012
X XX ±0.05
X X ±0.1
X ±0.25

DRAWN
ST Ling

UNIT
mm

CHECKED
H Shen

SCALE
1.4:1

REV
B

DRAWING NO.
FD101.DWG