

APPROVAL SHEET

CUSTOMER NAME :

ITME : B型2MM短针压接插座(针)

MODEL : PRT-B125M-D

MATERIEL NO :

DATE : 20/10/2007

APPROVED BY:

深圳市普瑞泰电子有限公司

地址。深圳市福田区深南中路南光捷佳大厦2121室


电话: 0755-83981317 83983895

传真: 0755-83981375


网址: www.szpretek.com


邮箱: liubinwu@szpretek.com, wj@szpretek.com

CONTACT ARRANGEMENT

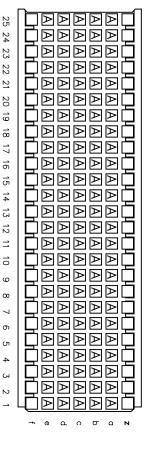

MAX





	Þ	REV	
		DESCRIPTION	
	HELLY 10/31/01'	DRAWN/DATE	
		CHECK/DATE	
		APPROVED/DATE	

- 1.0 ELECTRICAL CHARACTERISTICS:
 1.1 CURRENT RATING: 1.0 AMPERES AT 70°C
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE:750V r.m.s
 1.3 INSULATION RESISTANCE:10000 MEGOHMS MINIMUM ≥

100


00

- 1.4 CONTACT RESISTANCE: 20mΩ MAXIMUM.
- 2.0 MECHANICAL CHARACTERISTICE:2.1 CONTACT INSERTION FORCE: 0.75N /CONTACT2.2 CONTACT SEPARATION FORCE: 0.15N/CONTACT MAXIMUM MINIMUM

- 3.0 MATERIAL:
- 3.1 CONTACT: PHOSPHOR BRONZE
- 3.2 INSULATION: THERMOPLASTIC GLASS-FILLED, UL 94V-0 RATED

- 4.0 FINISHES:4.1 CONTACT: SELECT 30U"AU AND TAIL 100U"TIN, OTHER AREA GOLD FLASH NICKLE 50U" OVER5.0 ENVIRONMENT:

- 6.0 THE CONNECTOR COMPLY WITH INTERNATIONAL IEC 61076-4-101 STANDARDS 5.1 OPERATING TEMPERATURE: -55°C TO +125°C



⊳

Recommended PCB Layout	48.00	- *	 *		100

W∃IV	UNIT:	.xxx	.×	×	×	
			.XXX ±0.03	±0.05	±0.10	±0.20 X.
⊕ /∐	mm	.xxx	.xx* ±1.0* APPROVED	.x° ±2.0° CHECKED	×	
	m	.xxx* ±0.5* MATE	±1.0°	±2.0°	±3.0°	
~.		MATE	APPR(CHEC	±3.0° DRAWN	
			OVED	KED	Ž	
74	ジェール				HELLY	
市普瑞泰电		SCALE 0.7			HELLY 10/31/02' TITLE:	
			0.7		_	02'
			DWG NO:	PART NO:	TITLE	
深圳市普瑞泰电子有限公司	REV A A A A A A A A		0.	0:	••	
	177	A A A A A A A A A A A A A A A A A A A		A-	10:	PRT-
	<u>ا</u>	SHEET	A-1021-1250	1021-12501	PRT-B125M-L	
		SHEET 1 of 1		1	M-D	
					<u> </u>	