



PRETEK

APPROVAL SHEET

CUSTOMER NAME :

ITME : 6PIN接线端子公座

MODEL : CPH2X3X6.35

MATERIEL NO :

DATE : 20/10/2007

APPROVED BY:

深圳市普瑞泰电子有限公司

地址: 深圳市福田区深南中路南光捷佳大厦2121室

电话: 0755-83981317 83983895

传真: 0755-83981375




网址: www.szpretek.com

邮箱: liubinwu@szpretek.com, wj@szpretek.com

REV	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVED/DATE
A	NEW RELEASE	X.wei		
B	REVISE Δ X1	张春光 07/03/03		
C	REVISE Δ X5	张春光 07/16/03		

Δ NOTES:

- 1.0 MATERIAL: PA66+30%
Current Rating: 19A AT 70°C
Voltage Rating: 600V AC or DC
- 2.0 Dielectric Withstanding Voltage:
5.0KVAC or 10.0 KVDC between adjacent circuits
- 3.0 Insulation Resistance:
1000 Megohms minimum initial between adjacent circuits
- 4.0 Connector Mating:
Solid Pin--13.33N(1.36Kgf) per circuit
Split Pin--6.67N(0.68Kgf) per circuit
- 5.0 Connector Unmating:
Solid Pin--3.11N(0.32Kgf) per circuit
Split Pin--2.22N(0.23Kgf) per circuit
- 6.0 Contact Insertion Force:
22.25N(2.27Kgf) 1P.max.per contact
- 7.0 Contact Retention:
14.7N(1.5Kgf) 1P.min.per contact
- 8.0 Durability:
50 cycles,mating and unmating

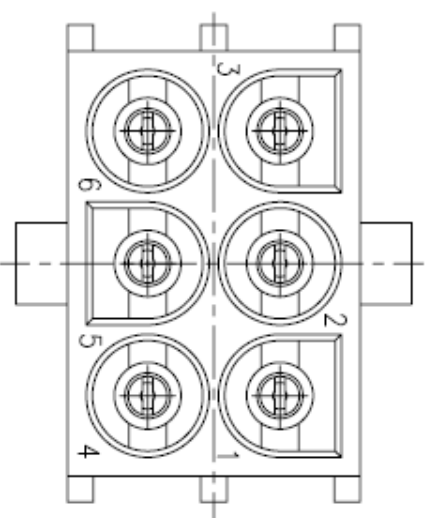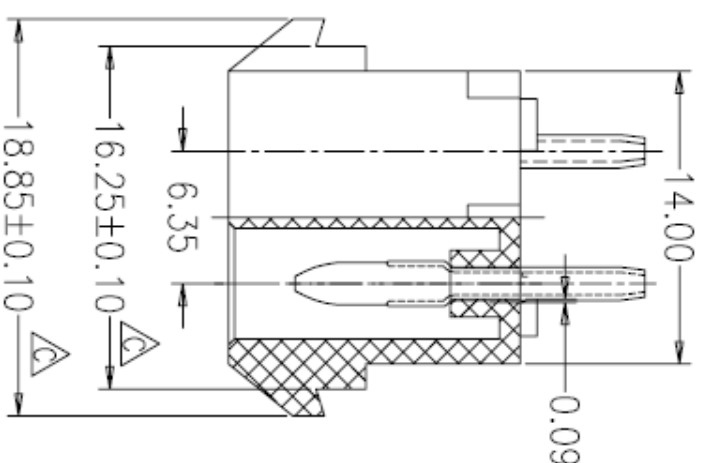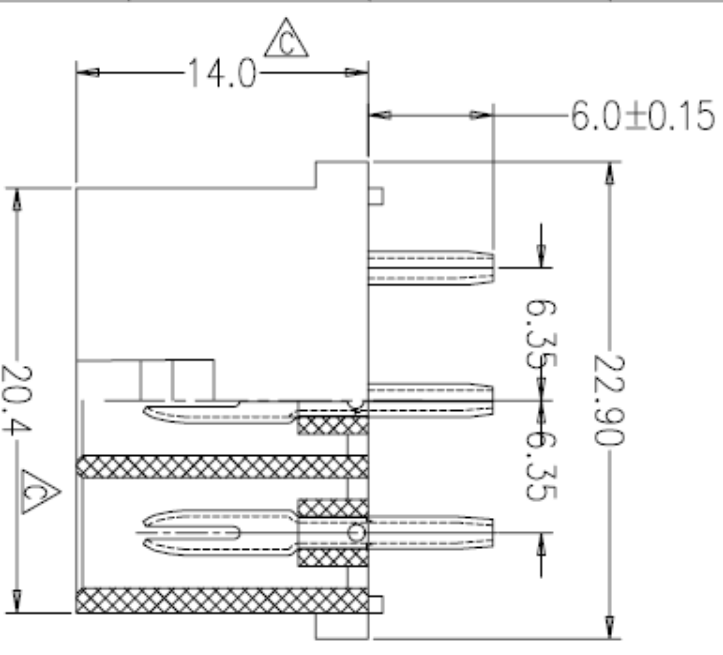

X	±0.20	X'	±3.0'	DRAWN	X.wei	TITLE:	CPH2X3X6.35
X	±0.10	X'	±2.0'	CHECKED		PART NO:	1092-00601
.XX	±0.05	.XX'	±1.0'	APPROVED		DWG NO:	A-1092-00601
.XXX	±0.03	.XXX'	±0.5'	MATL	/	SCALE	0.3
UNIT:	mm					REV	C
VIEW						SHEET	1 of 1

深圳市普瑞泰电子有限公司