



PRETEK

APPROVAL SHEET

CUSTOMER NAME :

ITME : 2.54间距扁平电缆插头

MODEL : 5212-XXDBXXBX01

MATERIEL NO :

DATE : 20/10/2007

APPROVED BY:

深圳市普瑞泰电子有限公司

地址: 深圳市福田区深南中路南光捷佳大厦2121室

电话: 0755-83981317 83983895

传真: 0755-83981375

网址: www.szpretek.com

邮箱: liubinwu@szpretek.com, wj@szpretek.com

HSF

NOTES:

Current Rating:3AMP

Contact Resistance:20mΩ max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature: -40℃ to +105℃

Contact Material:Brass

Contact plating:Au Over Ni

Insulator Material:PBT+30%GF(UL94V-0)

Ordering Information

5211- XX DB XX B X 01

No.of Pins

Contact Plating

Color Insulator

Marker

06P 26P

G0=Gold Flash

B=Black

W=With Bump

08P 30P

G1=3u"Gold

G=Grey(427C)

N=W/O Bump

10P 34P

G2=5u"Gold

E=Grey(413C)

12P 36P

G3=10u"Gold

14P 40P

G4=15u"Gold

16P 44P

G5=30u"Gold

18P 50P

S0=Gold Flash/Ni

20P 60P

S1=3u"Gold/Ni

22P 64P







S2=5u"Gold/Ni

24P

S3=10u"Gold/Ni

S4=15u"Gold/Ni

S5=30u"Gold/Ni

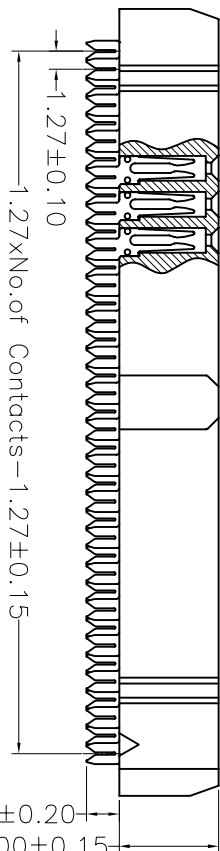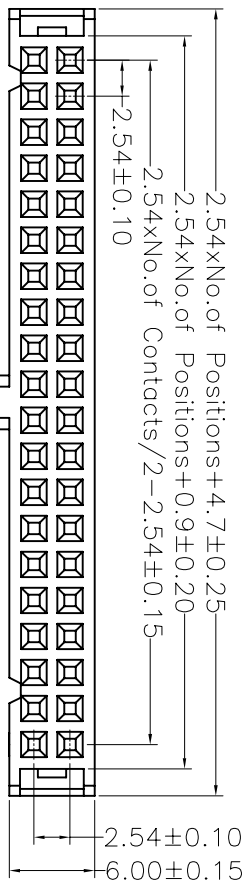

TYPE	PART NO.
TYPE 1	5211-XXDBXXBN01
TYPE 2	5211-XXDBXXBW01

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	08/05/17	SCALE	UNIT	SIZE	PART NO.	TITLE:	2.54 IDC SOCKET+SR (BOTH SIDE CONTACT)
A0	08/05/17	NEW			X.X	±0.40	DESIGN		2:1	mm	A4			
					X.XX	±0.25	CHECK				1/1			
					X.XXX	±0.15	APPROVE							
					Angle	± 3'								
					DM	TOL								

深圳市普瑞泰电子有限公司