

1.3.1 RF ANTENNA 0.81 mm CABLE END CONN.

ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 0.5A Max

IMPEDANCE: 50 OHM NOMINAL

VSWR = DC ~ 3GHz 1.3max.

3 ~ 6GHz 1.5max.

Cable retention force 12N min.



Durability: 30 cycles

Materials:

Shielding: Phosphor bronze

Terminal: Phosphor bronze

Housing: PBT

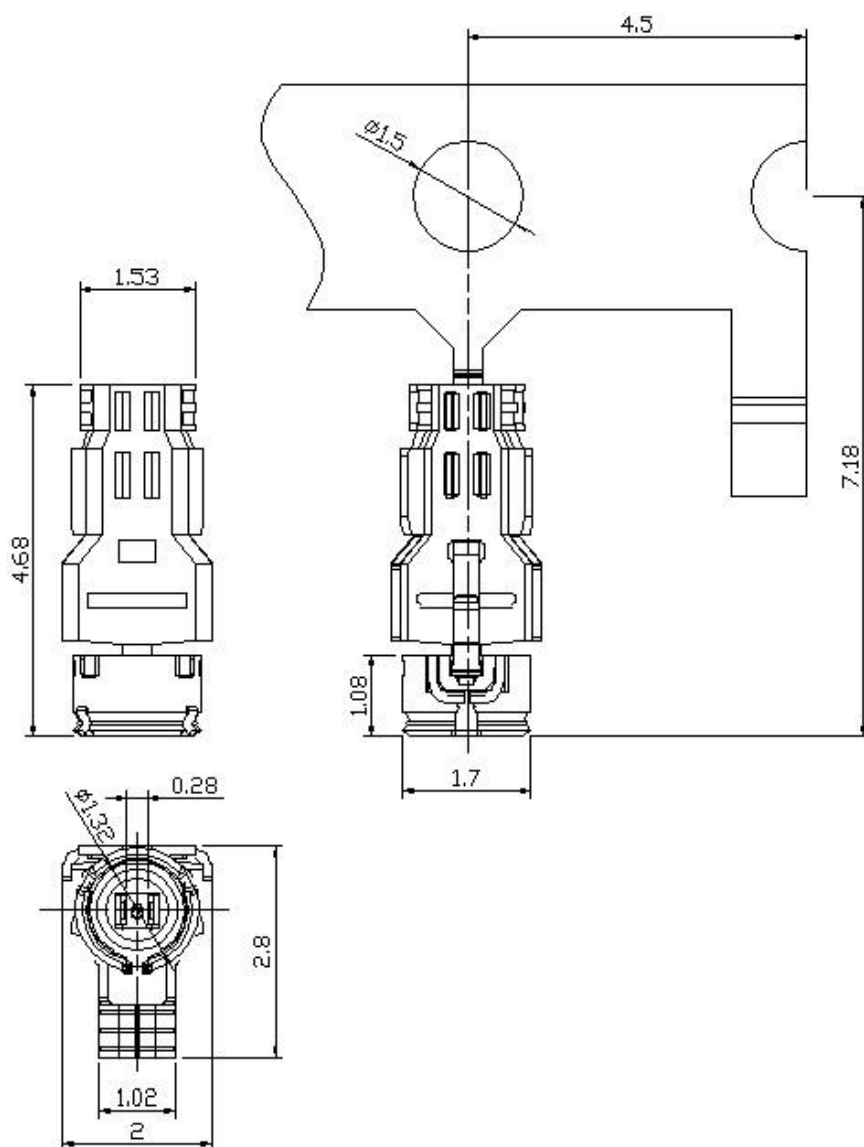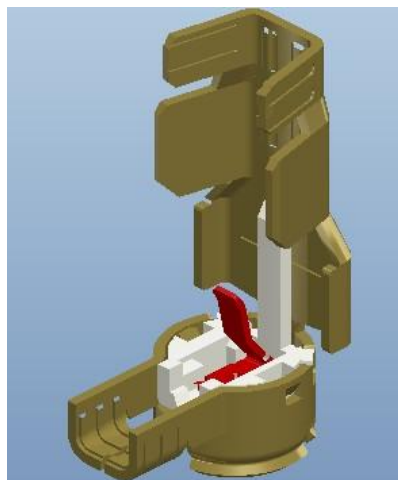

PART NO: ANC 0 081 * -321
 Plating SPEC: 1= Au 1 u" Min.
 2=Ni 50 u" Min.

Replace I-PEX PN: 20367-001R