

2.1 RF ANTENNA I & II PCB CONN.

ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 0.5A Max

IMPEDANCE: 50OHM NOMINAL

VSWR UP TO 3 GHz:1.3MAX

3GHz TO 6GHz:1.3MAX

MECHANICAL CHARACTERISTICS:







OPERATING TEMP. -40° TO 90°

DURABILITY: 30CYCLES.

Materials:

Shielding & terminal: BRASS

Housing: LCP

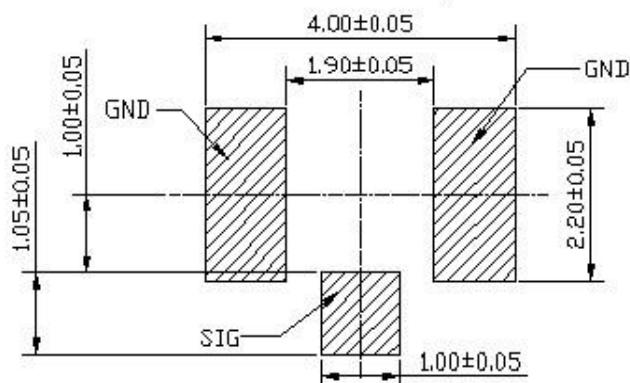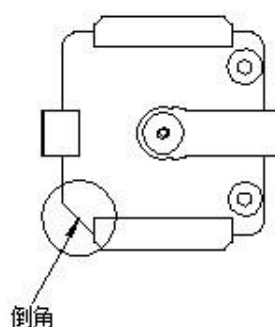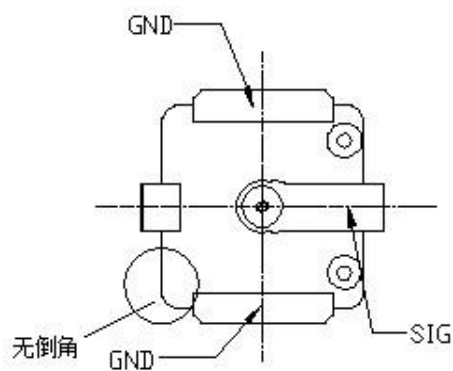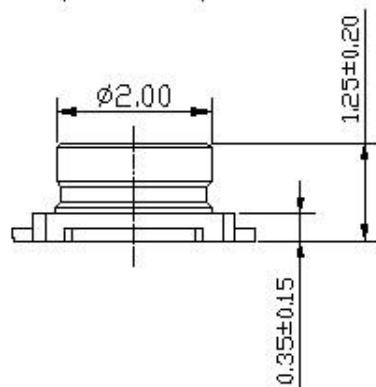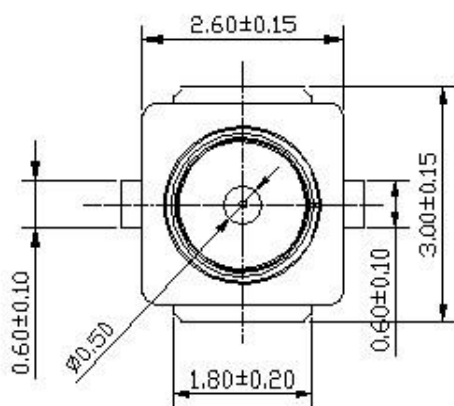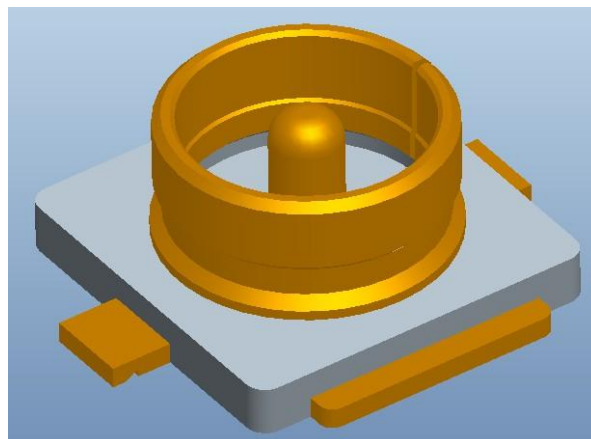

RECOMMENDED PC BOARD PATTERN DRAWING

PART No.:
AN B0200*-12*
**=电镀规格
1=GOLD FLASH
2=NI PLATING
3=Ag PLATING
3=无倒角
4=有倒角

PART NO: ANB 0 2 00 * -12 *

Replace I-PEX PN: 20279-001E-01