



PRETEK

APPROVAL SHEET

CUSTOMER NAME :

ITME : D 型混装大电流连接器

MODEL : DMP3-3V3K-73

MATERIEL NO :

DATE : 15/03/2007

APPROVED BY:

深圳市普瑞泰电子有限公司

地址: 深圳市福田区深南中路南光捷佳大厦2121室



电话: 0755-83981317 83983895

传真: 0755-83981375



网址: www.szpretek.com

邮箱: liubinwu@szpretek.com, wj@szpretek.com

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
VO.0			初版发行	20071108	

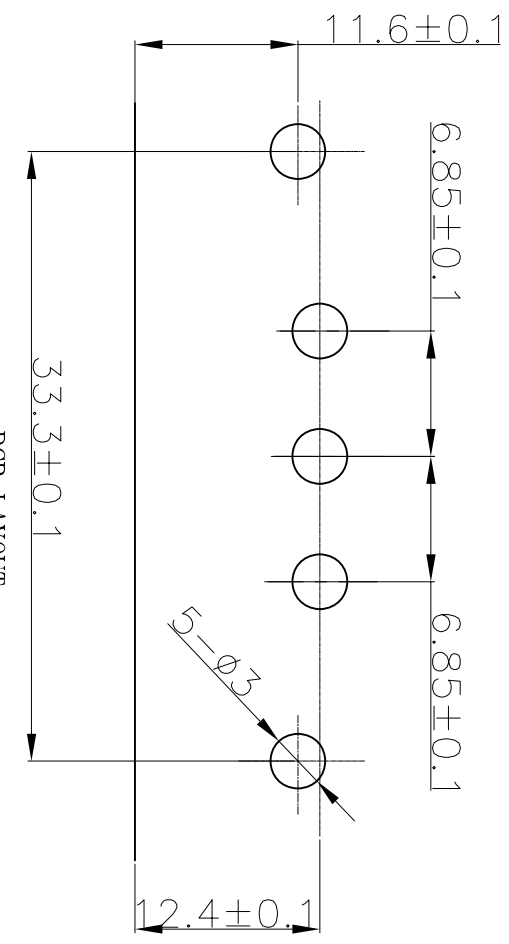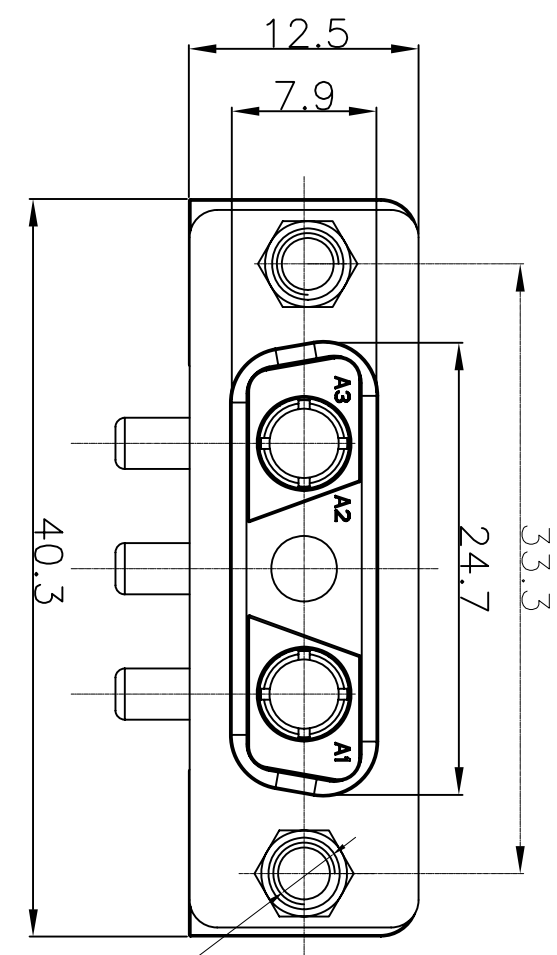

PCB LAYOUT

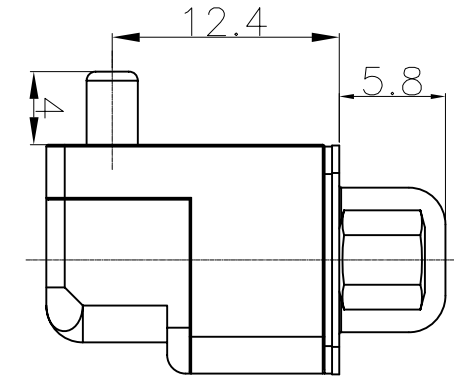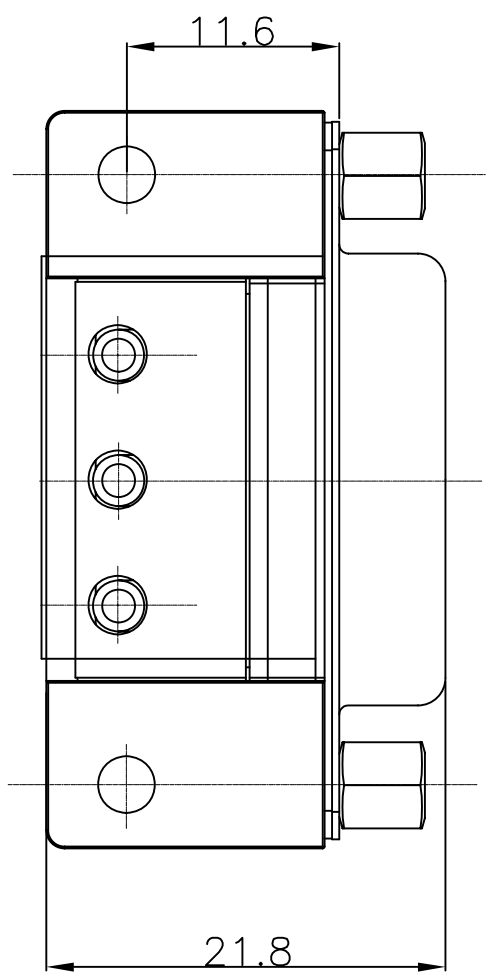

NOTES:

1. Material :
Housing: PBT301-G30 UL94V-0, Black;
Contact: Copper Alloy Gold plating ;
Shell: Spec Ni plating;
Unt: Copper Alloy, Ni plating;
Cver: PBT301-G30 UL94V-0, Black.
2. ACCORD WITH "ROHS".
3. Electrical performances
Rated current: 30A;
Contact resistant: $\leq 5m\Omega$;
Insulation resistant: $\geq 1000M\Omega$
Withstand voltage: AC 1000V/1min
4. Mechanical performances
Range: -55~105℃ Lift test: 500 cycles

 深圳市普瑞泰电子有限公司										TITLE: D型两孔一针弯式焊板插座	
DIM		TOL	DIM		TOL	FILE NO.	DATE	P/N: DMP3-3V3K-73			
X.		±0.1	X.		±2°	DESIGN:		SHEET: 1/1			
.X		±0.1	.X			CHECK:		SCALE: 1:1			
.XX		±0.1	.XX			REV.	VO.0	APPROVAL:	UNIT: mm		
.XXX			.XXX								

深圳市普瑞泰电子有限公司



PRETEK

一.	Material NO 物料代码:	
二.	Material Name 物料名称:	D 型混装两孔一针弯式焊板插座
三.	Product Type 产品型号:	DMP3-3V3K-73
四. Technical features 技术参数: 1. Electric characteristic 电气特性 1.1 Rated current 额定电流: 30A 1.2 Rated voltage 额定电压: 250V 1.3 Insulation resistance 绝缘电阻: $\geq 1000M\Omega$ 1.4 Voltage proof 耐电压: 1000V AC 1.5 Contact resistance 接触电阻: $\leq 5m\Omega$  2. Mechanical characteristic 机械特性 Mating Force 插入力: $\leq 5.0N$ Unmating Force 分离力: $\geq 1.0N$ Mechanical Durability 机械寿命: 500cycles 500 次 3. Material and surface plating 材料及表面处理 3.1 Contact 接触件 Material 材料: Copper alloy 铜合金 production Technique 生产工艺: Turing 车削加工 Surface plating 表面处理: Plating 5u", Gold over Nikel 镀金 5u" 3.2 Housing 基座 Material 材料: PBT, With GF, UL 94V-0 Black production Technique 生产工艺: Injecting 注塑加工 3.3 Sheel 外壳 Material 材料: Steel Strip 钢带 production Technique 生产工艺: Punching 冲压加工 Surface plating 表面处理: Plating Ni 镀镍 3.4 Unt 螺母 Material 材料: Copper alloy 铜合金 production Technique 生产工艺: Turing 车削加工 Surface plating 表面处理: Plating Ni 镀镍 3.5 Cover 盖板 Material 材料: PBT, With GF, UL 94V-0 Black production Technique 生产工艺: Injecting 注塑加工 4. Environment 工作环境 Temperature range 工作温度: $-55^{\circ}C \sim 105^{\circ}C$ Ralative humidity 相对湿度: $40^{\circ}C$时, (90-95) % Vibration 振动: 10Hz~2000Hz, Acceleration 加速度 $196m/s^2$ Shock 冲击: Acceleration $490m/s^2$		

五. **Most figure size 最大外型尺寸:** 40.3×12.5×21.8

六. **Material introduction 物料简介:**

1. Basic instance 基本情况

The design of electrical features and Mechanical features is based on IEC60807-2.

电性能和机械性能依据 IEC60807-2、IEC60603-2 标准进行设计。

The connector is socket of Series D Rectangular Connector. Its terminal method is PCB jointing, it could be applied with DMP-3V3J.

该连接器为 D 系列矩形混装插头，端接方式为 PCB 焊接，可与 DMP-3V3J 配合使用。

2. Pack and Storage 包装储存

Products are Packed with plastic box. The packing list must be in the packing box which has been gave clear indication of designation、type、lot number and products total number.

The products with packing are saved up at storeroom which environment temperature is 5℃～30℃, humidity≤80%, no acidity、no alkalescence and other corrosive gas, under these conditions the stockpile period doesn't exceed tow years from production date.

产品采用吸塑盒包装，箱内应有装箱单，装箱单及包装箱上注明产品名称、型号、批号及产品总数量。

包装好的产品应放环境温度为 5℃～30℃，相对湿度在 80%以下，周围空气中无酸性、碱性或其他腐蚀性气体的库房里储存，在上述条件下，储存期自生产日期不超过两年。

3. In point criterion 适用标准: IEC60807-2

4. Technique use 工艺使用:

PCB jointing PCB 焊接