



PRETEK

APPROVAL SHEET

CUSTOMER NAME :

ITME : A型2MM弯式压接插头（孔）

MODEL : PRT-A110F-D

MATERIEL NO :

DATE : 20/10/2007

APPROVED BY:

深圳市普瑞泰电子有限公司

地址：深圳市福田区深南中路南光捷佳大厦2121室

电话：0755-83981317 83983895

传真：0755-83981375





网址：www.szpretek.com

邮箱：liubinwu@szpretek.com, wj@szpretek.com



DESCRIPTION OF REVISIONS		DATE	DRAWN	CHECKED
REV	A	First Release	5/05/2001	ST Ling
				H Shen

NOTES :

- 1 CONNECTOR MEETS REQUIREMENT OF IEC 61076-4-101
- 2 MATERIAL :
-HOUSING : GLASS-FILLED PBT, COLOR GREY, UL 94V-0
-CONTACTS : PHOSPHOR BRONZE
- 3 CONTACT FINISH : (RoHS Compliant)
-H : 30u"(0.75um) GOLD PLATING ON MATING AREA, TIN PLATING ON TAIL AREA, FLASH GOLD PLATING ON NON-MATING AREA, NICKEL UNDERPLATE ALL OVER
-J : 40u"(1.0um) GOLD PLATING ON MATING AREA, TIN PLATING ON TAIL AREA, FLASH GOLD PLATING ON NON-MATING AREA, NICKEL UNDERPLATE ALL OVER
-K : 50u"(1.27um) GOLD PLATING ON MATING AREA, TIN PLATING ON TAIL AREA, FLASH GOLD PLATING ON NON-MATING AREA, NICKEL UNDERPLATE ALL OVER
-L : CONTACT LUBRICATED WITH LUBRICANT
- 4 CONNECTOR PRINTED WITH COMPANY NAME, PART NUMBER, AND BATCH NUMBER

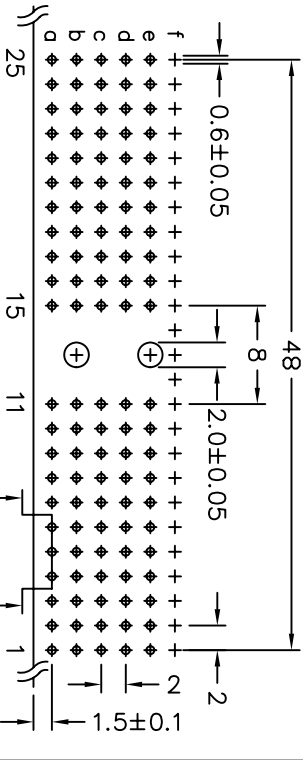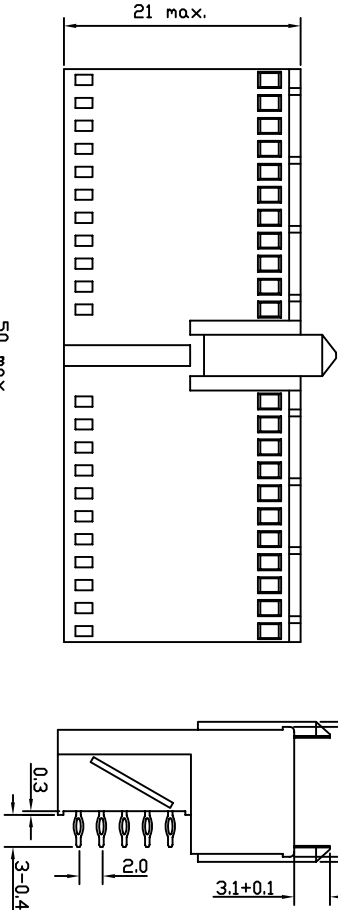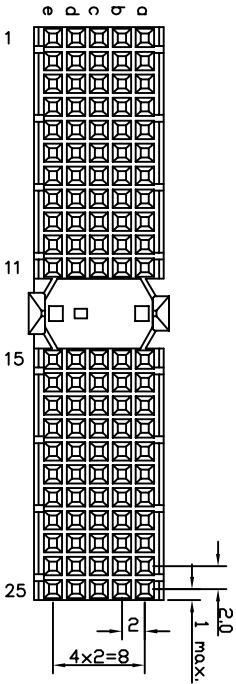

RECOMMENDED PCB HOLE LAYOUT
COMPONENT SIDE
SCALE 1.5 : 1

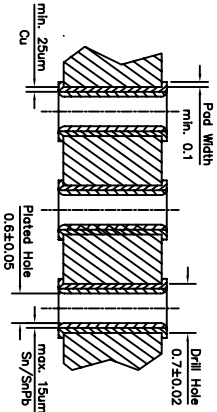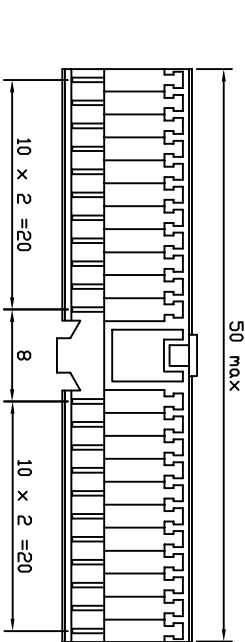

RECOMMENDED HOLE SPECIFICATIONS
SECTION A-A
SCALE 6 : 1

DESCRIPTION : 2.0mm FEMALE, TYPE A				深圳市普瑞泰电子有限公司				MILLIMETRE	
CUSTOMER DRAWING								X.XXX ±0.012	
PART NUMBER								X.XX ±0.05	
								X.X ±0.1	
								X ±0.25	
NO.1	PRT-A110F-D	NO.4		DRAWN	UNITS	ANGLE			
NO.2		NO.5		ST Ling	mm	±1°			
NO.3		NO.6		CHECKED	SCALE	REV	DRAWING NO.		
				H Shen	1.4:1	A	F0205.DWG		